

04/07/99
JCS84 U.S. PTO

A

UTILITY PATENT APPLICATION TRANSMITTAL

(New Nonprovisional Applications Under 37 CFR § 1.53(b))

Attorney Docket No.

MS-129981.1

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith is a patent application identified as follows:

First-named inventor: Dean J. Blackketter

Title: "Communicating Scripts in a Data Service Channel of a Video Signal"

(X) Original Patent Application.

() Continuing Application (prior application not abandoned):

() Continuation () Divisional () Continuation-in-part (CIP)
of prior application No: _____ Filed on: _____

() A statement claiming priority under 35 USC § 120 has been added to the specification.

Enclosed are:

- 21 pages of Specification and Title Page
- 5 pages Claims
- 1 page Abstract
- 6 pages of Formal Drawings
- 2 pages Declaration/Power of Attorney (unsigned)
- 4 pages PTO-1449 form
- 1 copy of each cited reference (10 references)
- X Transmittal letter (in duplicate)
- X A check for filing fee (\$1,102.00)
- X Return Receipt Postcard

JCS84 U.S. PTO
09/287985
04/07/99

CLAIMS AS FILED				
FOR	NO. FILED	NO. EXTRA	RATE	FEE
Total Claims	26	6	\$18.00	\$ 108.00
Independent Claims	6	3	\$78.00	\$ 234.00
Multiple Dependent Claims (if applicable)				\$0.00
Assignment Recording Fee				\$0.00
Basic Filing Fee				\$760.00
Total Filing Fee				\$1,102.00

I hereby certify that this is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated below and is addressed to:

Box Patent Application
Commissioner of Patents and Trademarks
Washington, D.C. 20231

By: Arthur J. Behiel

Typed Name: Arthur J. Behiel

Express Mail Label No.: EE795959430US

Date of Deposit: 4/7/99

Respectfully submitted,

By: Arthur J. Behiel

Arthur J. Behiel, Attorney for Applicants, Reg. No.39603

Date: 4/7/99

Correspondence Address:

7041 Koll Center Parkway, Suite 280
Pleasanton, CA 94566
Phone: (925) 461-2616
Fax: (925) 461-0961

This correspondence is being deposited with the United States Postal Service as Express Mail addressed to: Commissioner of Patents and Trademarks; Washington, D. C. 20231, on April 7, 1999, Express Mail receipt No. EE795959430US.

COMMUNICATING SCRIPTS IN A DATA
SERVICE CHANNEL OF A VIDEO SIGNAL

Dean J. Blackketter

Daniel J. Zigmond

TECHNICAL FIELD

The invention relates generally to supplementing broadcast television programming with information of interest to broadcast viewers.

BACKGROUND OF THE INVENTION

The Internet is a worldwide collection of networks and gateways. The Internet includes a backbone of high-speed data communication lines between major nodes, consisting of thousands of commercial, government, educational, and other computer systems, that route data and messages. The World Wide Web (the Web) is a collection of formatted hypertext pages located on numerous computer systems around the world that are logically connected by the Internet. The Web has become a valuable resource for information relating many subjects.

Web browsers, software providing user interfaces to the Web, allow individuals to access Internet content from personal computers. Internet terminals, such as those pioneered by WebTV Networks, Inc., the assignee of the present invention, have made the Web accessible to an even larger segment of the population by providing Web access without a personal computer. Internet terminals (also commonly referred to as set-top boxes) provide Web access using an ordinary television (TV) set as a display and a remote control or wireless keyboard for user input.

Figure 1 illustrates a basic configuration of an Internet system and broadcast television network 100. Network 100 includes a pair of clients 110 and a receiver/client 112. Receiver/client 112 is so named because it operates both as a television receiver and as an Internet client. Hereafter, receiver/client 112 is referred to as receiver 112 for simplicity.

Clients 110 and receiver 112 are coupled to a modem pool 120 via direct-dial, bi-directional data connections 130, which may be telephone (POTS, i.e., "plain old telephone service"), cable, satellite forward channels, ISDN (Integrated Services Digital Network), or any other similar type of connection. Modem pool 120 is typically coupled to a number of remote servers 140 via a network infrastructure, such as the Internet 160. An additional server 150 specifically supports receiver 112.

Clients 110 and receiver 112 communicate bi-directionally with servers 140 and 150 through modem pool 120 and the Internet 160. Modem pool 120 is typical of those found today throughout the world providing access to the Internet and private networks. In addition to communicating with servers 140 and 150, receiver 112 receives broadcast data and video from a broadcast television network 170 via, e.g., antennas 175 or a cable network (not shown).

Figure 2 illustrates an embodiment of receiver 112. Receiver 112 includes set-top box 200, an ordinary analog television set 210, and a remote control 220. Set-top box 200 may be integrated with television set 210. Television set 210 displays video data, including a graphical user interface, conveyed from set-top box 200 by a video link

1 230. Video link 230 is an RF (radio frequency), S-video,
2 composite video, or other video link.

3 Set-top box 200 includes hardware and software for
4 receiving and decoding a broadcast video signal 240, such
5 as an NTSC, PAL, SECAM, or other TV system video signal,
6 and for providing video data to the television set via
7 video link 230. Set-top box 200 also includes hardware
8 and/or software for providing a user with a graphical user
9 interface 250 capable of displaying Web pages (e.g., HTML
10 or XML pages) and broadcast video. User interface 250 can
11 notify the user of the presence of encoded data embedded in
12 the video signal. The notification may be audible, visual,
13 or a combination of the two. For example, user interface
14 250 might temporarily display an icon in a portion of the
15 screen.

16 Set-top box 200 may include both a standard modem and
17 an ISDN modem, such that the communication link between
18 set-top box 200 and server 150 (Figure 1) can be either a
19 telephone (POTS) connection 260 or an ISDN connection 270.
20 Set-top box 200 receives power through a power line 280.

21 A user operates remote control 220 to control set-top
22 box 200 in browsing the Web, sending e-mail, and performing
23 other Internet-related functions. Set-top box 200 receives
24 commands from remote control 220 via an infrared (IR)
25 communication link 290. A keyboard (not shown) may also be
26 included.

27 28 EXEMPLARY RECEIVER SYSTEM ARCHITECTURE

29 Figure 3 is a block diagram illustrating internal
30 features of set-top box 200. Set-top box 200 is controlled
31 by a processing unit, such as central processing unit (CPU)
32 300, which is coupled to an Application-Specific Integrated

1 Circuit (ASIC) 310. ASIC 310 contains circuitry that
2 implements certain features provided by set-top box 200.
3 ASIC 310 is coupled to an audio digital-to-analog converter
4 (DAC) 320 that provides audio output to television 210.
5 ASIC 310 is also coupled to a video encoder 330 that
6 provides video output to television 210. An IR interface
7 335 detects IR signals transmitted by remote control 220
8 and, in response, provides corresponding electrical signals
9 to ASIC 310. A standard telephone modem 340 and/or an ISDN
10 modem 342 are coupled to ASIC 310 to provide connections
11 260 and 270, respectively, to the Internet.

12 A television (TV) interface 345 conveys broadcast
13 video signals to ASIC 310, allowing video data carried in
14 broadcast video signal 240 to be presented to a viewer on
15 TV 210. TV interface 345 also extracts other data that may
16 be embedded in the video signal. The data so extracted, or
17 a portion thereof, may be displayed concurrently with a
18 television program. For example, analog broadcast signals
19 typically include a portion known as the vertical blanking
20 interval (VBI) that is used to transmit, among other
21 things, closed captioning information. Data inserted into
22 the VBI are extracted by TV interface 345 and displayed on
23 the TV 210.

24 Set-top box 200 also includes read-only Memory (ROM)
25 350, a random-access memory 355, and a mass storage device
26 360. ROM 350 stores program code for application software
27 executed by CPU 300. RAM 355 serves as temporary storage
28 for CPU 300 as CPU 300 executes instructions. Mass storage
29 device 360 may be used to input software or data to set-top
30 box 200 or to store information received either from
31 network connections or from broadcast signals. Mass storage

1 device 360 includes any suitable data storage medium, such
2 as magnetic tapes, magnetic disks, and optical disks.

3 A number of companies support appliances similar to
4 receiver 112 to enhance broadcast television with Internet
5 content. For example, Intel® Intericast® technology offers a
6 VBI inserter that enables content creators to insert Web
7 pages into the VBI of a broadcast signal. Dedicated
8 receiver platforms then sample the VBI of the broadcast
9 signal to obtain and display the Web pages. Unfortunately,
10 the bandwidth of the VBI is limited, so content-rich Web
11 pages can be slow to broadcast. As a result, content
12 updates can be undesirably slow.

13 WebTV® for Windows® is similar to Intericast®
14 technology, but has the ability to update information
15 presented by a broadcast Web page by broadcasting a script
16 capable of interacting with the Web page. Targeted
17 receivers receive the script and store the script in memory
18 for later use. The content creator then causes the script
19 to be executed by broadcasting a message that identifies
20 the stored script and the Web page with which the script is
21 to interact.

22 The broadcasting techniques of WebTV® for Windows®
23 work well to update information presented by Web pages.
24 However, the processes of downloading, storing, and later
25 triggering a script are collectively complex and time
26 consuming. Further, such scripts are not themselves
27 incorporated into the language defining Web pages, but
28 instead remain separate from the Web pages with which they
29 interact. Broadcast scripts can therefore alter the image
30 presented by a Web page but are limited in their ability of
31 change the functionality of the page.

1 SUMMARY OF THE INVENTION

2 The present invention is directed to methods and
3 apparatus for enhancing an information resource, such as a
4 Web page, simultaneously residing in memory on a number of
5 remote receivers.

6 Web pages are authored using HTML, for "Hypertext
7 Markup Language." HTML uses tags to mark elements, such as
8 text and graphics, in a document to indicate how web
9 browsers should display these elements to the user and
10 respond to user actions. HTML pages may also include one or
11 more scripts that allow HTML page authors to dynamically
12 control the interaction and behavior of their pages.

13 For purposes of the present invention, the HTML tags
14 and scripts of a given Web page define the "context" of
15 that page. This context is distinct from the visual image
16 provided by a page, which can vary between two identical
17 HTML pages depending upon a receiver's interpretation of
18 the page and upon the resources referred to by the page.
19 For example, a tag within an HTML page may refer to an
20 image that is independent of the page: altering the image
21 will change the visual representation of the page without
22 changing the context of the page. The present invention
23 allows content creators to alter both the visual
24 representation of a given page and the context of the page
25 by allowing content creators to broadcast scripts directed
26 to specified Web pages.

27 In accordance with the invention, a content creator,
28 (e.g., a program producer, broadcaster, affiliate, cable
29 company, or satellite provider), embeds a trigger in a data
30 service channel of a broadcast video signal. The embedded
31 trigger includes a resource identifier unique to a targeted
32 information resource and a script capable of modifying the

1 information resource. The script might be a script or a
2 segment of a script written in a scripting language, such
3 as JavaScript™, ECMAScript, JScript™, or VBScript. Such
4 scripts allow content creators to provide interaction
5 between an information resource and a viewer, to control
6 the receiver, and to dynamically create HTML content.

7 The script-bearing triggers (hereafter "script
8 triggers") are broadcast in the data service channel of a
9 broadcast video signal. Each receiver adapted to interpret
10 trigger content begins with an information resource, such
11 as a Web page, resident in memory. The receiver can obtain
12 such a resource via the Internet, broadcast video, or from
13 local storage. The receivers, tuned into the appropriate
14 broadcast signal, monitor the data service channel of that
15 signal for triggers that are directed to the information
16 resource resident on the receiver. Upon receipt of such a
17 script trigger, the receiver executes the script contained
18 within the trigger to alter the information resource and/or
19 displayed video defined by the resource.

20 Other features of the present invention will be
21 apparent from the accompanying drawings and from the
22 detailed description that follows.

23 24 BRIEF DESCRIPTION OF THE DRAWINGS

25 Figure 1 (prior art) illustrates a basic configuration
26 of an Internet system network 100.

27 Figure 2 (prior art) illustrates an embodiment of a
28 receiver/client 112 for displaying broadcast television and
29 Internet content.

30 Figure 3 (prior art) is a block diagram illustrating
31 internal features of a set-top box 200.

Figure 4 illustrates a communication system 400, including five content receivers 405-409 configured in accordance with the invention.

Figure 5 is a flowchart depicting a method for synchronizing broadcast video data with information resources residing in memory on a number of remote receivers.

Figure 6 is a flowchart depicting a method performed by a receiver configured in accordance with the invention to respond to script triggers.

DETAILED DESCRIPTION OF THE INVENTION

Figure 4 illustrates a communication system 400, including five content receivers 405-409 configured in accordance with the invention. Communication system 400 also includes two content sources, a web server 410 and a television broadcaster 415, and a conventional television 417. Web server 410 communicates with each of receivers 405-407 via the Internet 420, while broadcaster 415 communicates to each of receivers 405-409 and television 417 via a broadcast signal 421. Internet 420 is understood to include all modems, lines, and other intervening components required to communicate between server 410 and receivers 405-407.

Each of receivers 405-409 is configured to display Web pages, broadcast television, or both. Web pages are typically downloaded over the Internet, but may also be received from a broadcast television signal or retrieved from a local memory source, such as a disk drive. In each case, however, the Web pages are stored locally on the receivers.

Receiver 405 displays a "Sports Page" Web page 422 along with a broadcast baseball game 424. In accordance with the invention, a portion of web page 422, game score 426, for example, can be updated in response to a script received from broadcaster 415. Sports page 422 can thus be synchronized with baseball game 424 without connecting to the Internet. Updating just a portion of sports page 422 advantageously requires less bandwidth than updating the entire page.

Receiver 406 illustrates another advantage of this embodiment. Receiver 406 includes broadcast video 426 and a "Local Forecast" page 428. Web page 428 includes a form field 430 inviting a user to enter a local zip code. In accordance with the illustrated embodiment, broadcaster 415 can provide periodic script triggers including scripts that interact with the zip code to provide weather updates specific to the selected zip code. Such updates might include textual weather information or graphics, such as weather symbol 432. A number of scripting languages support this type of interaction between a page and the user. Exemplary scripting languages include JavaScript, ECMAScript, JScript™, and VBScript. Alternatively, broadcaster 415 can modify page 428 to include additional functionality by broadcasting a script for incorporation into page 428.

The following text is HTML code defining Local Forecast page 428. The HTML code includes a script entitled "Zip Code Weather" at `<http://www.weatherzip.com/page.html>` for accepting a zip code and responding to script triggers directed to particular zip codes. The script is written using the ECMAScript scripting language.

```

1  <HTML>
2  <HEAD><TITLE>Zip Code Weather</TITLE></HEAD>
3  <BODY>
4
5  <SCRIPT>
6  function newWeather(zip, weather) {
7      if (zip == zipForm.userZip)
8          weatherPic.src = weather + ".gif";
9  }
10 </SCRIPT>
11
12 <P>Your Zip: <FORM NAME=zipForm><INPUT TYPE="text"
13 NAME="userZip"></FORM></P>
14
15 <P>Today's Weather: <IMG NAME=weatherPic
16 SRC="sunny.gif"></P>
17
18 </BODY>
19 </HTML>

```

The foregoing weather script can be included in an original broadcast of page 428 or can be appended to page 428 using a script trigger that includes the requisite script (i.e., the portion of the foregoing HTML code between and including the <SCRIPT LANGUAGE> and </SCRIPT> tags). In either case, once page 428 includes the script a content creator can update page 428 to include a local forecast for zip code 98502 by broadcasting the following exemplary script trigger:

```

30
31 <http://www.weatherzip.com/page.html>[script:newWeather
32 ("94114","snow)][464c]

```

1
2 The "URL" field (separated by angle brackets) identifies
3 the target page, while the script field identifies the
4 script and related arguments to be passed to the target
5 page. The final field includes a checksum value for error
6 detection. The specifics of script-trigger syntax are
7 described below.

8 Receivers 407 and 408 illustrate yet another advantage
9 of this embodiment. Receivers 407 and 408 each illustrate
10 an example in which a user simultaneously views broadcast
11 baseball game 424 and a "Business News" page 434. Business
12 News page 434 might be in information resource associated
13 with a particular business channel or program that
14 periodically broadcasts script triggers to news page 434
15 that provide timely stock prices for a series of companies,
16 each company identified by a symbol.

17 Business News page 434 includes a form field 436 that
18 invites a user to enter a symbol corresponding to a public
19 company. In the depicted example, receiver 407 includes the
20 symbol MSFT in form field 436, while receiver 408 includes
21 the symbol BA. Receiver 407 then receives and displays the
22 MSFT stock price upon receipt of a script trigger directed
23 to page 434 and specifying the symbol MSFT; similarly,
24 receiver 408 receives and displays the BA stock price upon
25 receipt of a script trigger directed to page 434 and
26 specifying the symbol BA. Thus, instead of requiring a
27 broadcaster to display all stock prices, individual users
28 can adapt their environments to suit their own tastes.

29 A displayed television channel need not be related to
30 a displayed web page. For example, receiver 407 can tune
31 into two channels simultaneously so that a user can watch a
32 television program on one channel (e.g., baseball game 424)

1 while receiver 407 monitors the second channel for
2 enhancements to business page 434. Tuners capable of
3 monitoring two or more channels simultaneously are well
4 known in the art.

5 In each of the foregoing examples, the receiver
6 responded to some input from the user. The invention is
7 not, however, limited to interactive applications. For
8 example, receiver 409 is shown simultaneously displaying a
9 television show 438 and an airline page 440. Broadcaster
10 415 can cause airline page 440 to be updated by
11 transmitting a script trigger to page 440 without requiring
12 any user interaction. In the example, airline page 440
13 includes a text field 442 advising the viewer that San
14 Francisco International Airport (SFO) is closed due to fog.

16 SCRIPT TRIGGERS

17 Having described an exemplary environment in which
18 script triggers may be employed, script-trigger syntax and
19 usage will now be discussed. Trigger messages, or
20 "triggers," are instructions broadcast to receivers of
21 broadcast video. Such triggers generally instruct receivers
22 to take a specific action to synchronize the content of a
23 Web page with a broadcast television program. For purposes
24 of the present invention, "script triggers" are triggers
25 that include a script or a portion of a script capable of
26 enhancing a specified information resource.

27 Script triggers include a resource locator, a script
28 or a portion of a script, and may also include a human-
29 readable name and an expiration time. The resource locator
30 addresses a particular resource to be enhanced by the
31 trigger. In the example of receiver 405 of Figure 4, script

1 triggers intended to enhance sports page 424 would include
2 a resource locator specific to sports page 422.

3 A resource locator commonly associated with Web
4 content is the Uniform Resource Locator (URL). A URL is a
5 compact string representation of a location used to
6 identify an abstract or physical resource on the Internet.
7 Of course, alternative means of uniquely identifying
8 content may be employed. For example, it is appreciated
9 that keys (e.g., database indices), network addresses
10 (e.g., IP addresses), and other identification mechanisms,
11 alone or in combination, may be employed to uniquely
12 identify a selected resource. Therefore, while the term URL
13 refers to a specific type of content identifier used in
14 connection with the Web, the term uniform resource
15 identifier is used herein to refer to content/resource
16 identification mechanisms generally.

18 SCRIPT-TRIGGER SYNTAX

19 Script triggers may be transmitted in the VBI of an
20 analog broadcast video signal. The text service channels of
21 line 21 of the VBI provide a robust communication medium,
22 albeit at relatively low bandwidth. In some embodiments of
23 the invention, triggers are text based, and their syntax
24 follows a basic format that complies with the Electronic
25 Industries Association EIA-746A, "Transport of Internet
26 Uniform Resource Locator (URL) Information Using Text-2 (T-
27 2) Service" (September 1998), which is incorporated herein
28 by reference. EIA-746A defines the formatting necessary to
29 transmit Internet URLs using the vertical-blanking interval
30 of a broadcast television signal, and is incorporated
31 herein by reference.

1 In one embodiment that complies with EIA-746A, each
2 script trigger includes a URL followed by zero or more
3 attribute/value pairs and an optional checksum, as follows:

4
5 `<url> [attr1:val1] [attr2:val2] ... [attrn:valn] [checksum]`
6

7 The URL is enclosed in angle brackets. For example, the URL
8 "http://sports.com/scores.html" might identify sports page
9 422, indicating that a given trigger is intended to update
10 page 422.

11 The attribute/value pairs can be selected to achieve
12 some desired interaction with the specified resource. A
13 script attribute, formatted as [script:string], provides a
14 script or script fragment to execute within the context of
15 the page identified by the URL. For example,
16 [script:report_stock("MSFT", "\$92/SH")] might be directed
17 to business page 434 to update the stock price displayed to
18 those users specifying MSFT, or to introduce some new
19 functionality to page 434 by amending page 434 to include
20 an additional script. The "string" value is written as an
21 ECMAScript fragment in one embodiment, but can be written
22 in any number of scripting languages.

23 A "name" attribute, provides the user with readable
24 text. For example "[name:SFO CLOSED DUE TO FOG]" could be
25 used to alert a users as described above in connection with
26 receiver 409. The "name" attribute and the "script"
27 attribute can each provide text messages such as that
28 illustrated on airline page 440. The script attribute is
29 more powerful, however, because scripts can be used to
30 modify the context of page 440. For example, scripts can be
31 broadcast to receiver 406 to incorporate field 430 and the
32 script that provides page 428 with the ability to provide

1 local weather information. Script attributes allow content
2 creators to improve their Web pages without broadcasting
3 complete new pages.

4 A time stamp indicating a time after which the trigger
5 expires follows an "expires" attribute. One embodiment
6 employs the form *yyyymmddThhmmss*, where the capital letter
7 "T" separates the date from the time. The *time* string may
8 be shortened by reducing the resolution. For example
9 *yyyymmddThhmm* (no seconds specified) is valid, as is simply
10 *yyyymmdd* (no time specified at all). When no time is
11 specified, expiration is at the beginning of the specified
12 day. The expires attribute can be abbreviated as the single
13 letter "e" (e.g. [e:19971223]). The "expires" attribute
14 ensures that information contained in triggers is timely.
15 Without this attribute, a rebroadcast of a show might
16 provide an incorrect update, for example an erroneous stock
17 quote.

18 A checksum may be appended to the end of the logical
19 address link to detect data corruption that may occur
20 during receipt or transmission of a trigger. A two-byte
21 hexadecimal checksum is employed such as a checksum that
22 would be produced by the standard TCP/IP checksum algorithm
23 described in Request For Comments (RFC) 719, "Internet
24 Protocol," September 1981, which is incorporated herein by
25 reference. According to one embodiment, the checksum is
26 computed by pairing adjacent characters in the string
27 (starting with the first delimiter) to form 16-bit
28 integers. If there is an odd number of characters, the
29 final character is paired with a byte value of zero. The
30 checksum is computed such that the one's complement sum of
31 all of the 16-bit integers plus the checksum equals the 16-
32 bit integer with all 1 bits.

1 For a detailed discussion of the above-described
2 trigger syntax, see the Advanced Television Enhancement
3 Forum Specification (ATVEF), Versions 1.1 revision 26,
4 (2/2/99), which is incorporated herein by reference.

6 TRIGGER RECEIVER OBJECTS

7 Some embodiments of the invention require that
8 intended target resources include a trigger receiver
9 object. The trigger receiver object, implemented by the
10 receiver, processes triggers in the context of the resource
11 containing the trigger object. See the above-incorporated
12 ATVEF specification for a detailed discussion of trigger
13 objects, including their syntax and use in accordance with
14 an embodiment of the invention.

16 BROADCAST METHOD

17 Figure 5 is a flowchart depicting a method employed by
18 a content creator (e.g., a program producer, broadcaster,
19 affiliate, cable company or satellite provider) to
20 synchronize broadcast video data with information resources
21 stored locally on a number of remote receivers. The
22 information resources are, in one embodiment, Web pages
23 (e.g., HTML or XML pages). Information resources are
24 typically displayed, but this is not necessarily the case.
25 For example, a content creator might want to update locally
26 stored pages while the user is watching another channel, or
27 even while the video display is turned off. A user would
28 thus be presented with timely information each time the
29 user selected a particular information resource without
30 having to connect to the Internet or wait for the selected
31 channel to broadcast the latest content.

1 In accordance with the invention, the content creator
2 first creates a script trigger (step 500) using, for
3 example, the syntax described above. Next, the broadcaster
4 embeds the script trigger into a data service channel of
5 some broadcast signal (step 510). In one embodiment, the
6 broadcast video signal is a National Television Standards
7 Committee (NTSC) video signal including a vertical blanking
8 interval (VBI), and the data service channel is selected
9 from a captioning service channel of a text service
10 channel. The video signal may also be Phase Alternate Lines
11 (PAL), Sequential Couleur Avec Memoire (SECAM), High
12 Definition Television (HDTV), or a digital video signal
13 such as a Digital Video Broadcasting (DVB) signal or an
14 Advanced Television Systems Committee (ATSC) signal.

15 Where the broadcast video signal is NTSC video signal,
16 the trigger can be imbedded into line 21 of the vertical
17 blanking interval (VBI). The protocols for broadcasting
18 data in line 21 of the VBI call for relatively robust, low-
19 speed communication. Higher bandwidth can be obtained using
20 other lines of the VBI. Finally, the broadcaster broadcasts
21 the script trigger (step 520).

22 The upstream video may contain previously encoded data
23 in line 21 of the VBI. Each content creator is therefore a
24 potential re-encoding point along the broadcast
25 distribution path. At any re-encoding point, the existing
26 data may be extracted from the captioning data channel or
27 the text service channel of the video signal. Subject to
28 certain bandwidth limitations, the content creator may then
29 embed one or more script triggers into a captioning or text
30 service packet of the video signal. The video signal may
31 then be transmitted to the next downstream receiving
32 device(s). This process may be repeated during video signal

1 processing at each point along the video signal
2 distribution path.

3 The foregoing broadcast methods are embodied in
4 machine-executable instructions, which can be used to cause
5 a general-purpose or special-purpose processor programmed
6 with the instructions to perform the steps. Alternatively,
7 the steps might be performed by specific hardware
8 components that contain hardwired logic for performing the
9 steps, or by any combination of programmed computer
10 components and dedicated hardware.

11

12 RECEIVER METHOD

13 Figure 6 is a flowchart depicting a method performed
14 by a receiver configured in accordance with the invention
15 to respond to script triggers. First, the receiver stores
16 an information resource, such as a web page, locally in the
17 receiver (step 600). The information resource can be stored
18 in video memory for immediate display or elsewhere in
19 memory, for example on a magnetic hard disk. The receiver
20 can obtain the resource from any number of information
21 sources, such as from a server on the Internet, from a
22 broadcast signal, or from a local memory device, such as a
23 hard-disk drive or CD ROM drive.

24 Next, in step 610, the receiver monitors one or more
25 broadcast channels for valid script triggers directed to
26 the stored information resource. For example, where the
27 information resource is identified by a URL, the receiver
28 monitors broadcast video for script triggers that include a
29 URL matching that of the information resource. A valid
30 script trigger is one that is encoded in a predetermined
31 syntax, such as the syntax described earlier, and whose
32 resource locator and attribute/value pairs are not

1 corrupted, as determined by a comparison of a checksum
2 generated by the receiving device to the checksum
3 accompanying the script trigger. The receiver ignores
4 invalid script triggers.

5 Upon receipt of a valid script trigger matching the
6 information resource (step 620), the receiver determines
7 whether the resource locator associated with the script
8 trigger matches that of the information resource (decision
9 630). If not, the receiver disregards the script trigger
10 (step 640) and continues monitoring the broadcast channel.
11 If, on the other hand, the resource locator associated with
12 the script trigger matches that of the receiver, then the
13 information resource executes the script or script fragment
14 within the script trigger (step 650) and continues
15 monitoring the broadcast channel (step 610).

16 The foregoing receiver methods are embodied in
17 machine-executable instructions, which can be used to cause
18 a general-purpose or special-purpose processor programmed
19 with the instructions to perform the steps. Alternatively,
20 the steps might be performed by specific hardware
21 components that contain hardwired logic for performing the
22 steps, or by any combination of programmed computer
23 components and dedicated hardware.

24 25 REFERENCES

26 The following references provide additional background
27 information relating to the present invention, and are
28 incorporated herein by reference.

- 29 1. W3C, "HTML 4.0 Specification," chapters 1-18 (April
30 1998), identified as page "[http://www.w3.org/TR/REC-](http://www.w3.org/TR/REC-html40/)
31 [html40/](http://www.w3.org/TR/REC-html40/)".

2. ECMA - European association for standardizing information and communication systems, "Standard ECMA-262, 2nd Edition" (August 1998), the ECMAScript Language Specification.
3. W3C, "Document Object Model (DOM) Level 1 Specification" (October 1998), identified as page <http://www.w3.org/TR/1998/REC-DOM-Level-1-19981001/DOM.txt>.
4. R. Panabaker, S. Wegerif, and D. Zigmond, "The Transmission of IP Over the Vertical Blanking Interval of a Television Signal," (February 1999), identified as page "<http://www.ietf.org/internet-drafts/draft-ietf-ipvbi-nabts-02.txt>".
5. S. Deering, "Host Extension for IP Multicasting" (August 1989).
6. J. Postel, "User Datagram Protocol," (August 1980), identified as page "<ftp://ftp.isi.edu/in-notes/rfc768.txt>".
7. Triggers: EIA-608, Recommended Practice for Line 21 Data Service: Electronic Industries Association EIA-608, "Recommended Practice for Line 21 Data Service" (September 1994).
8. Request For Comments (RFC) 791, "Internet Protocol, DARPA Internet Program Protocol Specification" (September 1981).

While the present invention has been described in connection with specific embodiments, variations of these embodiments will be apparent. For example, while described in connection with video signals, the invention is equally applicable to non-video broadcast applications like digital radio.

1 Therefore, the spirit and scope of the appended claims
2 should not be limited to the foregoing description.

1 CLAIMS

2 What is claimed is:

3

4 1. A method comprising:

- 5 a. storing, in a receiver, an information resource
6 identified by a first resource identifier;
7 b. monitoring a data service channel of a broadcast
8 signal for a script trigger, wherein the script
9 trigger includes a second resource identifier and
10 a script; and
11 c. executing the script on the receiver, upon
12 receipt of the script trigger, if the second
13 resource identifier matches the first resource
14 identifier of the information resource.

15

16 2. The method of Claim 1, further comprising displaying
17 the information resource stored in memory.

18

19 3. The method of Claim 1, wherein the information
20 resource is a Web page.

21

22 4. The method of Claim 1, wherein the information
23 resource comprises tags that define a context of the
24 resource, and wherein the script modifies the context.

25

26 5. The method of Claim 4, wherein the Web page further
27 includes a second script.

28

29 6. The method of Claim 1, wherein the script is a
30 fragment of a second script resident on the
31 information resource.

32

- 1 7. The method of Claim 6, wherein the script fragment
2 comprises a command to the second script.
3
- 4 8. The method of Claim 1, further comprising displaying a
5 video portion of the broadcast signal, wherein the
6 script trigger synchronizes the information resource
7 with the video portion of the broadcast signal.
8
- 9 9. The method of Claim 1, wherein the broadcast signal
10 comprises video data, and wherein the script trigger
11 induces an enhancement of the information resource.
12
- 13 10. The method of Claim 1, wherein the first and second
14 resource identifiers are URLs.
15
- 16 11. A method for synchronizing a broadcast signal and an
17 information resource simultaneously residing on a
18 plurality of remote receivers, the method comprising:
19 a. embedding a script trigger in a data service
20 channel of the signal, the script trigger
21 including:
22 i. a resource identifier unique to the
23 information resource; and
24 ii. a script for updating the information
25 resource; and
26 b. broadcasting the signal.
27
- 28 12. The method of Claim 11, wherein the signal is
29 broadcast to a second plurality of receivers in
30 addition to the first-mentioned plurality of
31 receivers, and wherein the information resource does
32 not reside on the second plurality of receivers.

- 1
- 2 13. The method of Claim 11, wherein the data service
- 3 channel is a captioning service channel.
- 4
- 5 14. The method of Claim 11, wherein the information
- 6 resource includes a second script, and wherein the
- 7 first-mentioned script passes a value to the second
- 8 script.
- 9
- 10 15. The method of Claim 11, wherein the broadcast signal
- 11 is a National Television Standards Committee (NTSC)
- 12 video signal including a text or data-service channel.
- 13
- 14 16. The method of Claim 15, wherein the data service
- 15 channel is line 21 of the NTSC video signal.
- 16
- 17 17. The method of Claim 11, wherein the broadcast video
- 18 signal is selected from a group consisting of Phase
- 19 Alternate Lines (PAL), Sequential Couleur Avec Memoire
- 20 (SECAM), High Definition Television (HDTV), a Digital
- 21 Video Broadcasting (DVB) signal, or an Advanced
- 22 Television Systems Committee (ATSC) signal.
- 23
- 24 18. The method of Claim 11, further comprising generating
- 25 a checksum for the resource identifier and the script
- 26 and inserting the checksum into the script trigger.
- 27
- 28 19. A method comprising:
- 29 a. embedding a script trigger in a data service
- 30 channel of a video signal, the data service
- 31 channel selected from a captioning service
- 32 channel or a text service channel, the script

- 1 trigger complying with a predetermined syntax and
2 including a resource identifier and a script; and
3 b. broadcasting the video signal.

4
5 20. A machine-readable medium having stored thereon data
6 representing sequences of instructions, wherein the
7 instructions, when executed by a processor, cause the
8 processor to:

- 9 a. embed a script trigger in a data service channel
10 of a signal, the script trigger including:
11 i. a resource identifier unique to an
12 information resource; and
13 ii. a script for updating the content of the
14 information resource; and
15 b. broadcast the signal.

16
17 21. A machine-readable medium having stored thereon data
18 representing sequences of instructions, wherein the
19 instructions, when executed by a processor, cause the
20 processor to:

- 21 a. display an information resource identified by a
22 first resource identifier;
23 b. monitor a data service channel of a broadcast
24 video signal for a script trigger, wherein the
25 script trigger includes a second resource
26 identifier and a script; and
27 c. execute the script, upon receipt of the script
28 trigger, if the second resource identifier
29 matches the first resource identifier of the
30 information resource.

1 22. The machine-readable medium of Claim 21, wherein the
2 information resource is a Web page.

3
4 23. The machine-readable medium of Claim 21, wherein the
5 instructions cause the process to display a video
6 portion of the broadcast video signal, and wherein
7 executing the script trigger synchronizes the
8 information resource with the video portion of the
9 broadcast video signal.

10
11 24. The machine-readable medium of Claim 21, wherein the
12 first and second resource identifiers are URLs.

13
14 25. The machine-readable medium of Claim 21, wherein the
15 information resource includes a second script, and
16 wherein the instructions cause the process to pass a
17 value to the second script upon receipt of the script
18 trigger.

19
20 26. An appliance comprising:
21 a. a video display adapted to display a video image
22 and an information resource identified by a first
23 resource identifier;
24 b. means for monitoring a data service channel of a
25 broadcast video signal for a script trigger,
26 wherein the script trigger includes a second
27 resource identifier and a script; and
28 c. means for executing the script, upon receipt of
29 the script trigger, if the second resource
30 identifier matches the first resource identifier.

1 ABSTRACT OF THE DISCLOSURE

2 Described are methods and apparatus for enhancing an
3 information resource, such as a Web page, simultaneously
4 residing in memory on a number of remote receivers. A
5 content creator, (e.g., a program producer, broadcaster,
6 affiliate, cable company or satellite provider), embeds a
7 trigger in a data service channel of a broadcast signal.
8 The trigger includes a resource identifier unique to the
9 information resource and a script capable of modifying the
10 information resource. The script might be a script or a
11 segment of a script written in a conventional scripting
12 language. Each receiver that includes the targeted
13 information resource monitors the data service channel of
14 the broadcast video signal for script-bearing triggers
15 directed to that resource. If a receiver receives a script-
16 bearing trigger directed to the resident resource, the
17 receiver executes the script contained within the trigger
18 to alter the resource and/or the displayed video defined by
19 the resource.

1/6

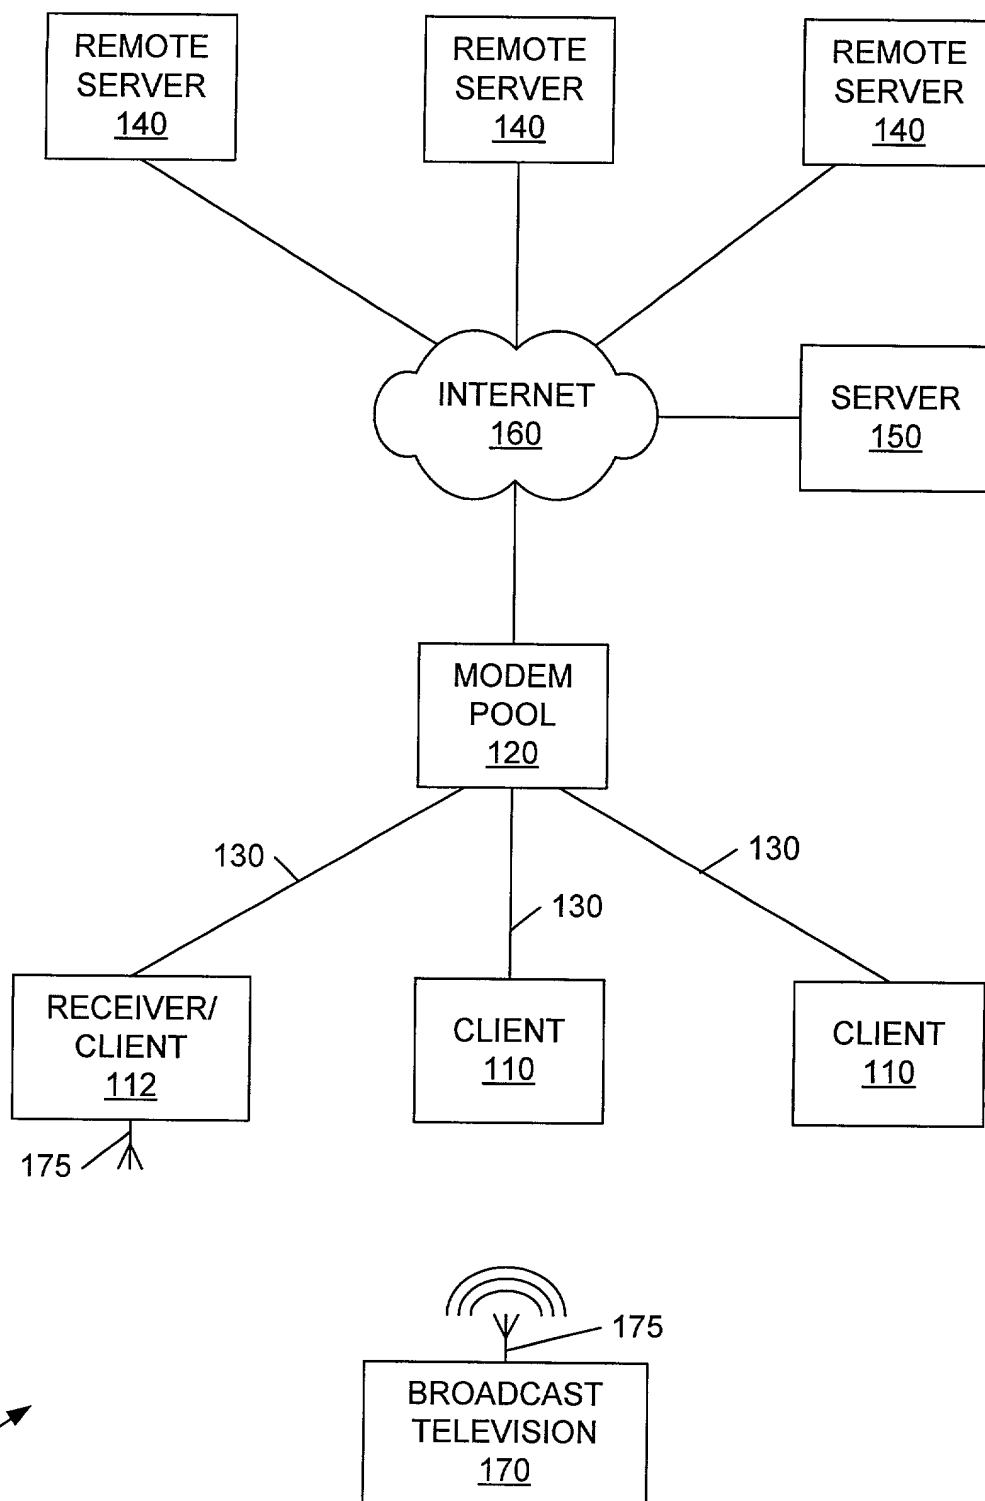


FIG. 1
(PRIOR ART)

2/6

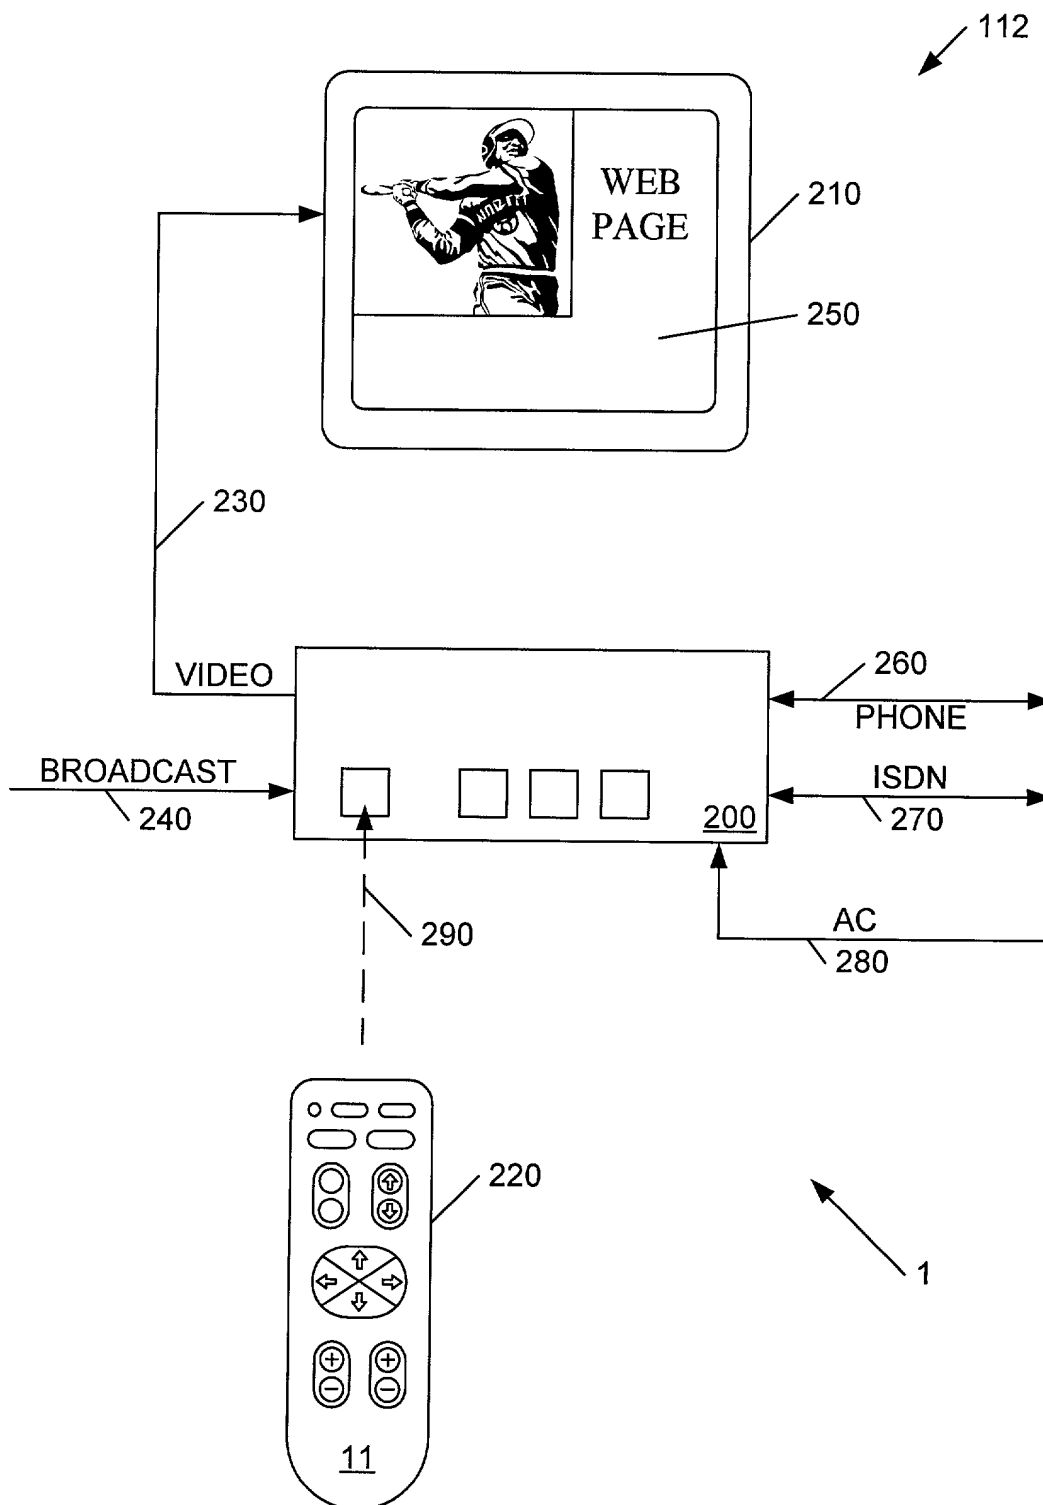


FIG. 2
(PRIOR ART)

3/6

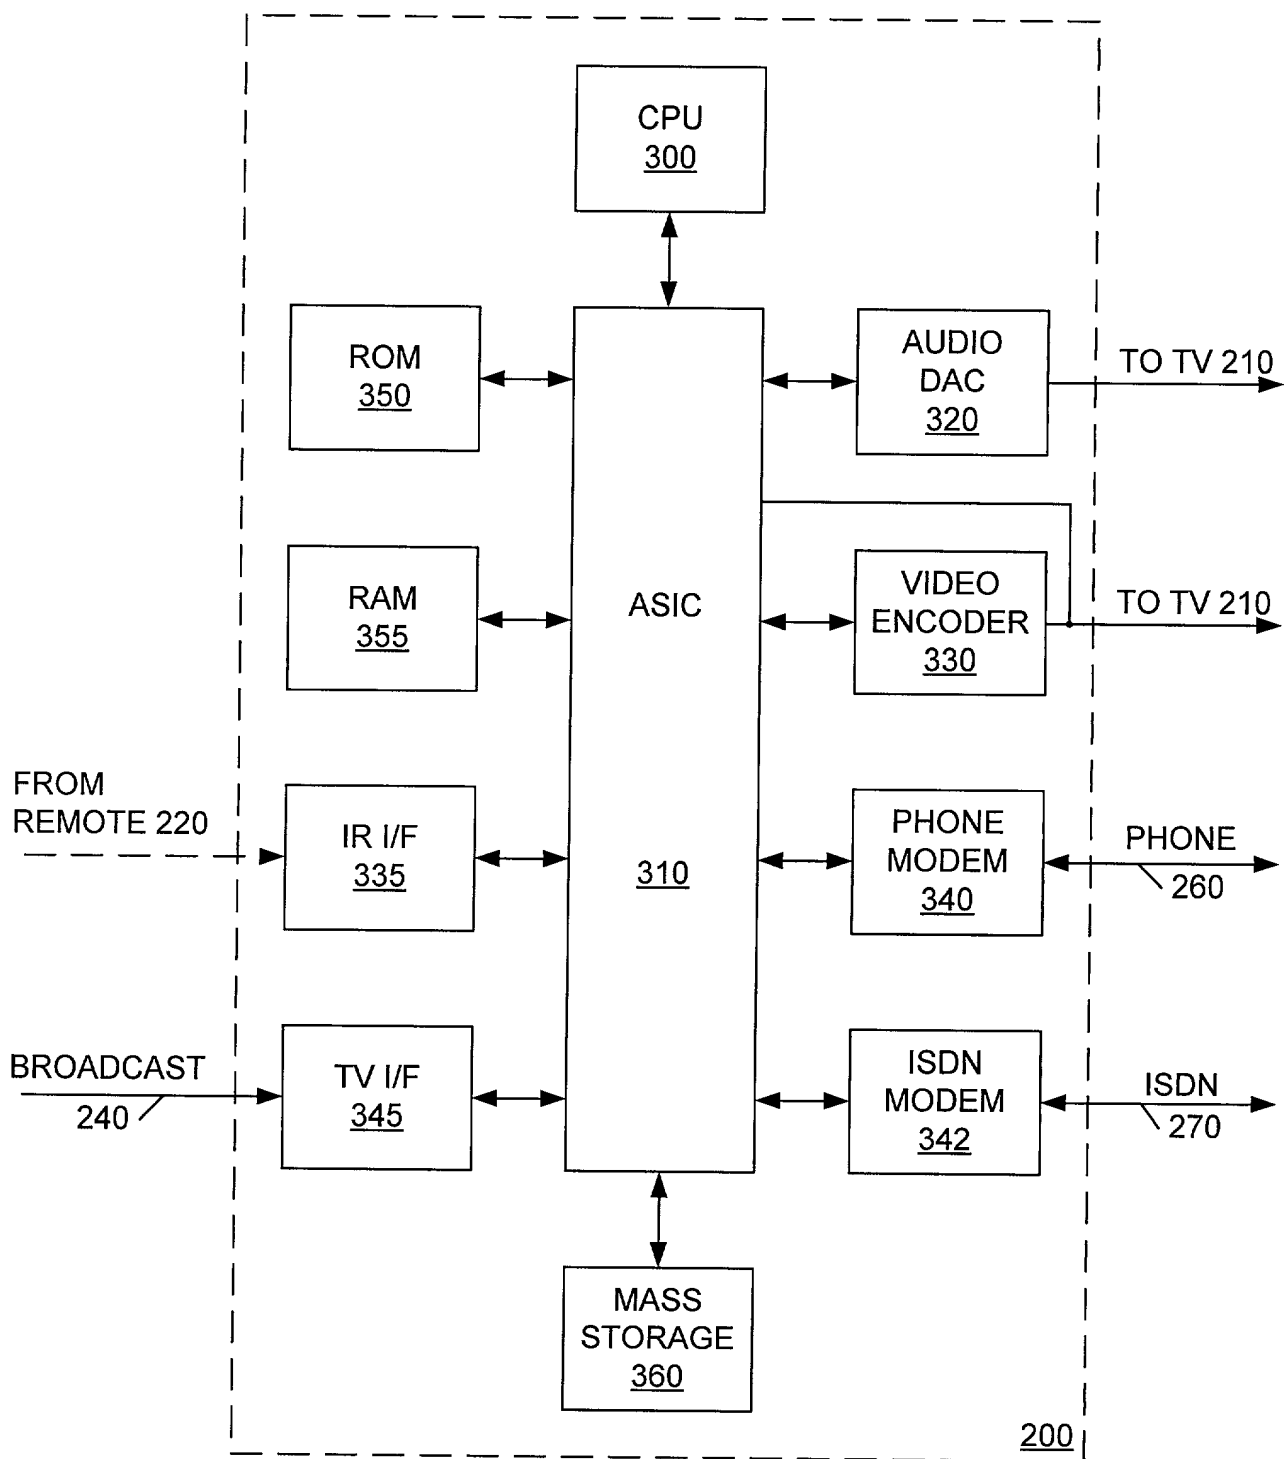


FIG. 3
(PRIOR ART)

5862360

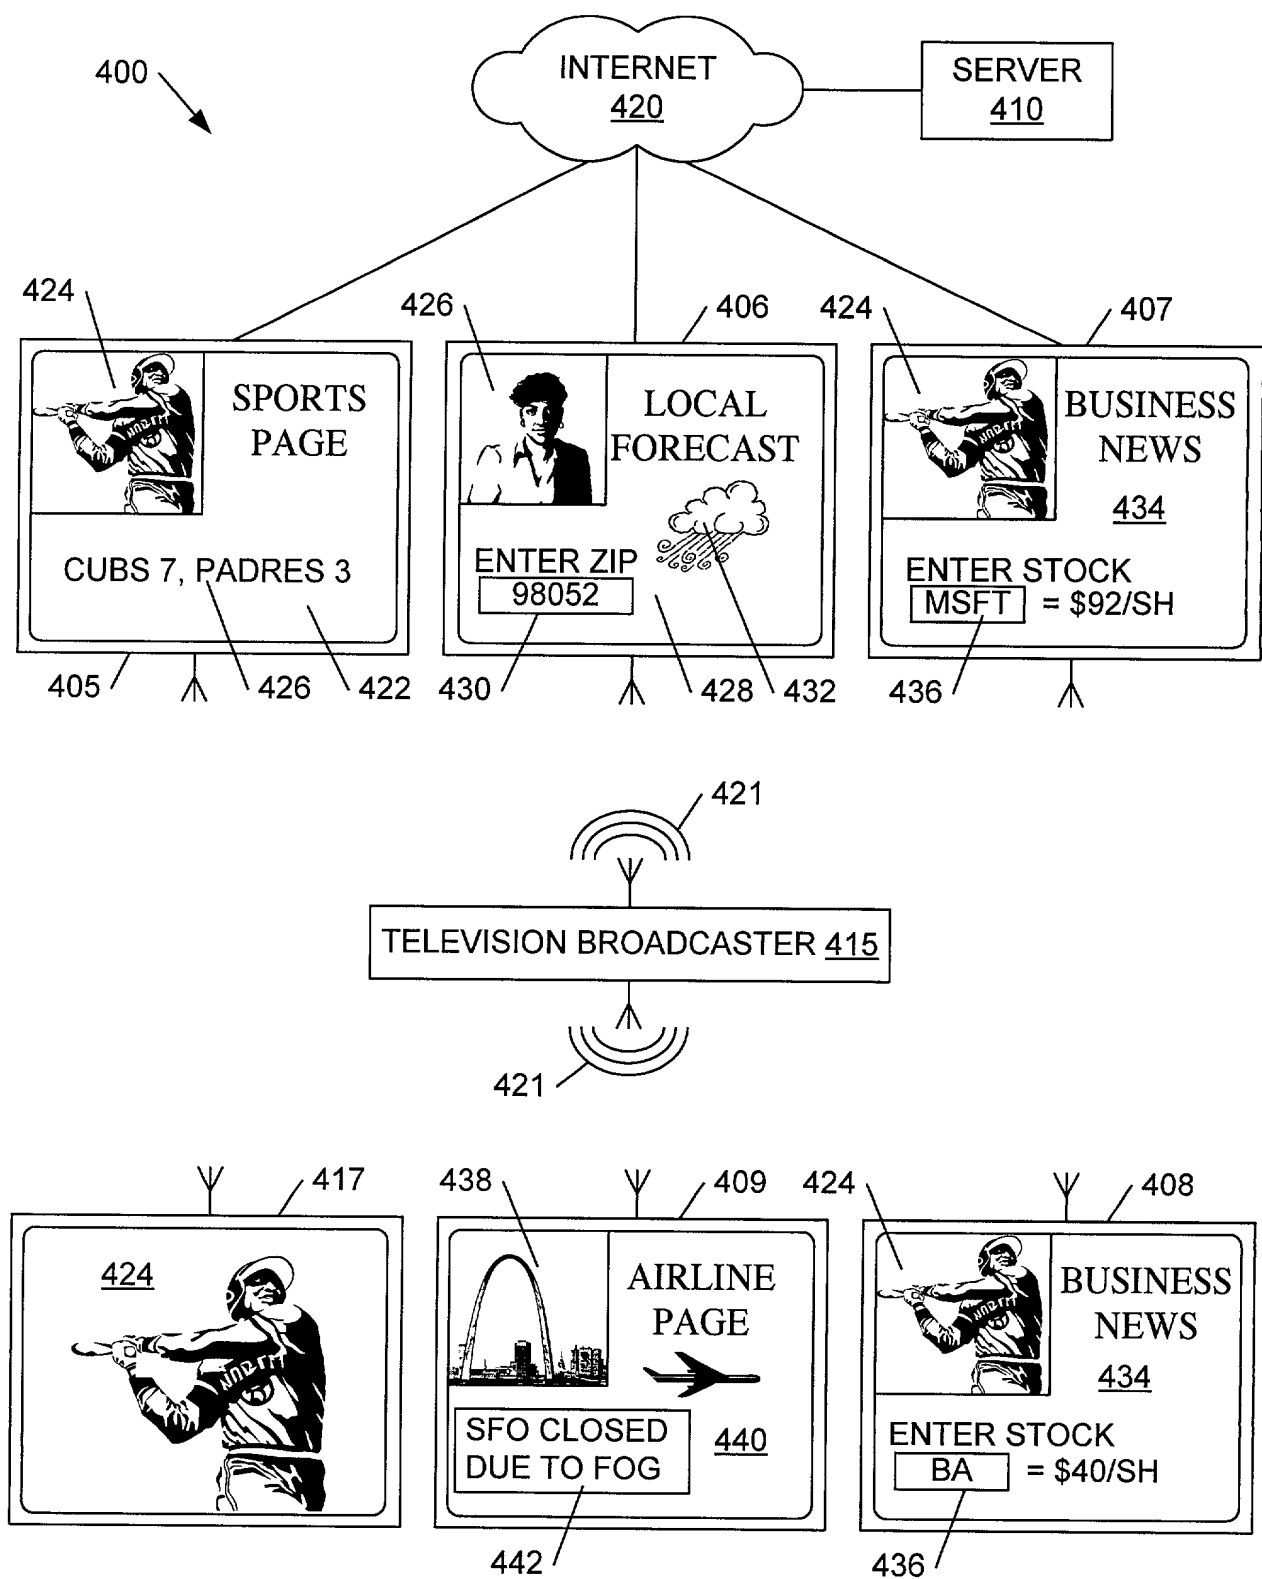


FIG. 4

5/6

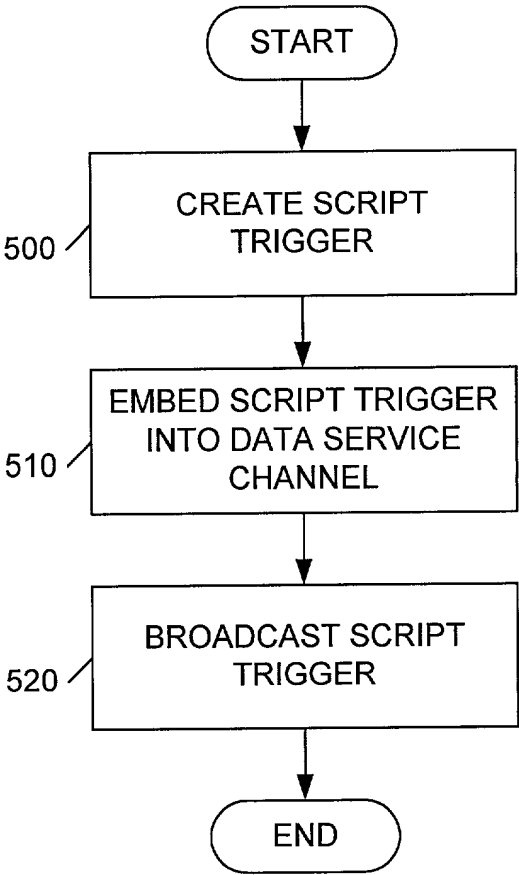


FIG. 5

58623260 "58623260"

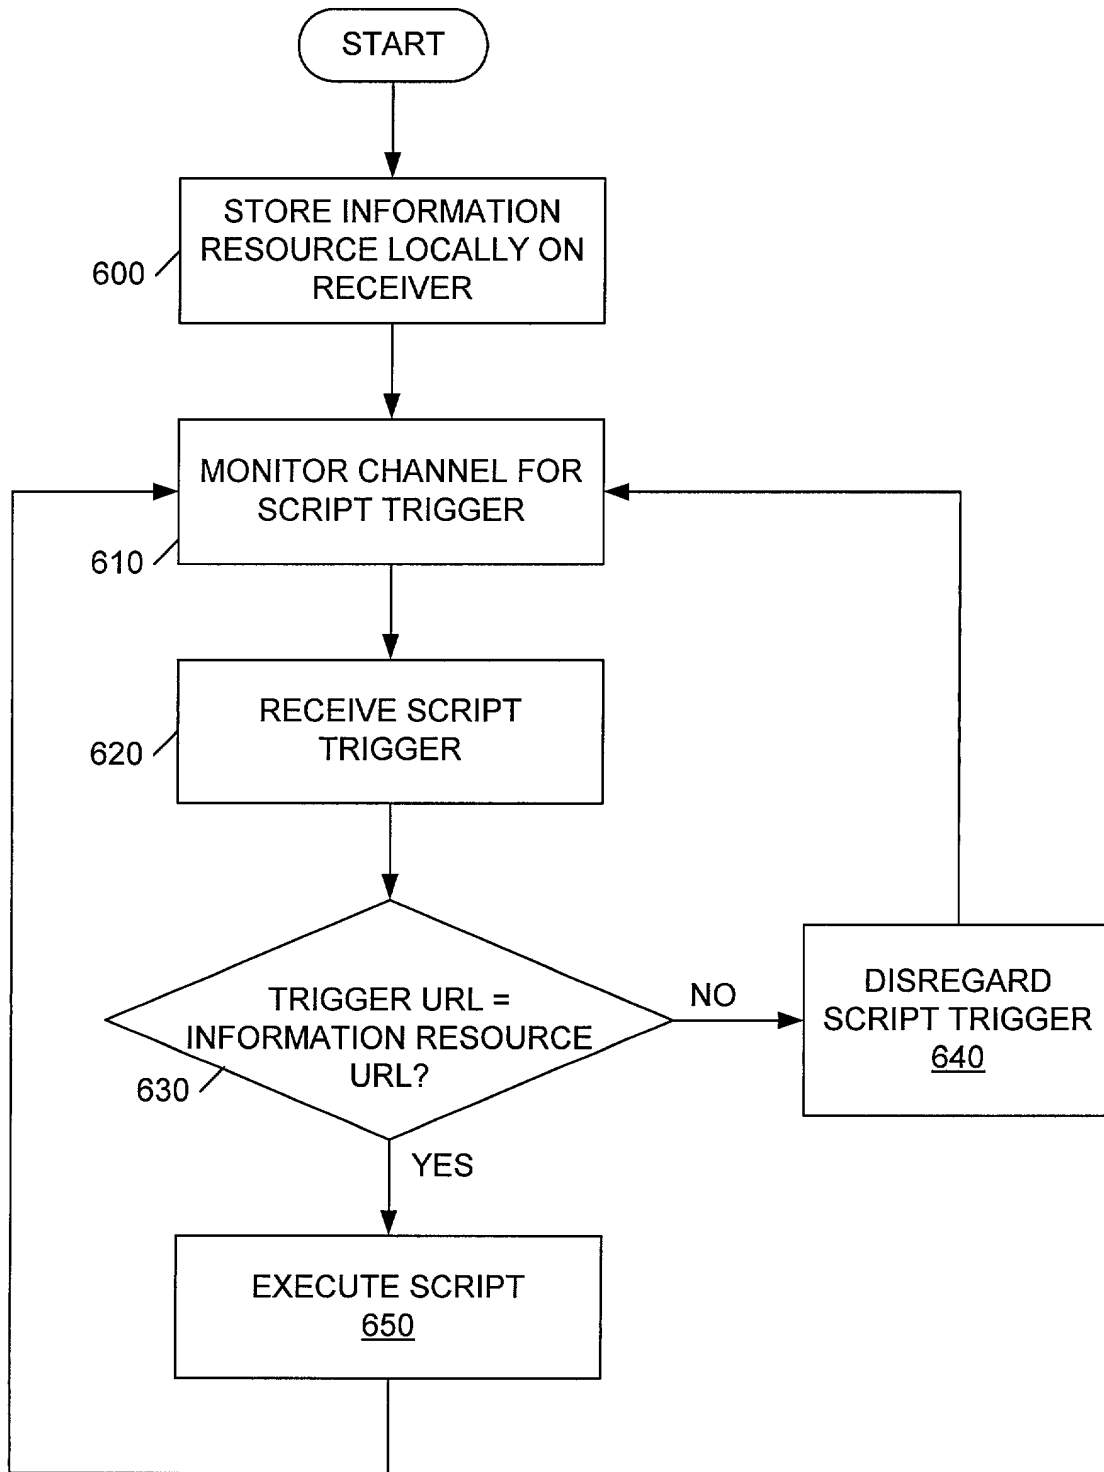


FIG. 6

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post-office address, and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought by way of the application entitled:

“Communicating Scripts in a Data Service Channel of a Video Signal”

which (check) ☒ is attached hereto.
☐ and is amended by the Preliminary Amendment attached hereto.
☐ was filed on _____ as Application Serial No. _____.
☐ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate, or any PCT international application(s) designating at least one country other than the United States of America listed below, and have also identified below any foreign application(s) for patent or inventor's certificate or an PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) on which priority is claimed:

APPLICATION NUMBER	COUNTRY	DAY/MONTH/YEAR FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
N/A			YES:____ NO:____
			YES:____ NO:____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE
N/A	

U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)
N/A		

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) listed below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Arthur J. Behiel, Reg. No. 39,603
 Katie E. Sako, Reg. No. 32,628

Daniel D. Crouse, Reg. No. 32,022
 T. Lester Wallace, Reg. No. 34,748

Send Correspondence to:

Arthur J. Behiel, Patent Attorney
7041 Koll Center Parkway, Suite 280
Pleasanton, CA 94566

Direct Telephone Calls To:

Arthur J. Behiel
Tel: (925) 461-2616
Fax: (925) 461-0961

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Dean J. Blackketter**Citizenship:** US**Residence:** 104 Saturn Street
San Francisco, CA 94114**Post Office Address:** Same as above

Inventor's Signature

Date**Full Name of Inventor:** Daniel J. Zigmond**Citizenship:** US**Residence:** 5020 Tolt River Road
Carnation, WA 98014**Post Office Address:** Same as above

Inventor's Signature

Date